

OFFICE OF THE MARION COUNTY SURVEYOR

SECTION RECORD CORNER

SECTION 25 TOWNSHIP 16 RANGE 4

DATE: 10-26-04

PARTY CHIEF: Wilcoxon

CREW: _____

TYPE OF MARKER: Harrison


METHOD OF ESTABLISHMENT: County: 6-27-04

IN. S.P.C. E ZONE NAD '83

NAME: 16042504

N: 505793.9880(m)

E: 67553.2330(m)

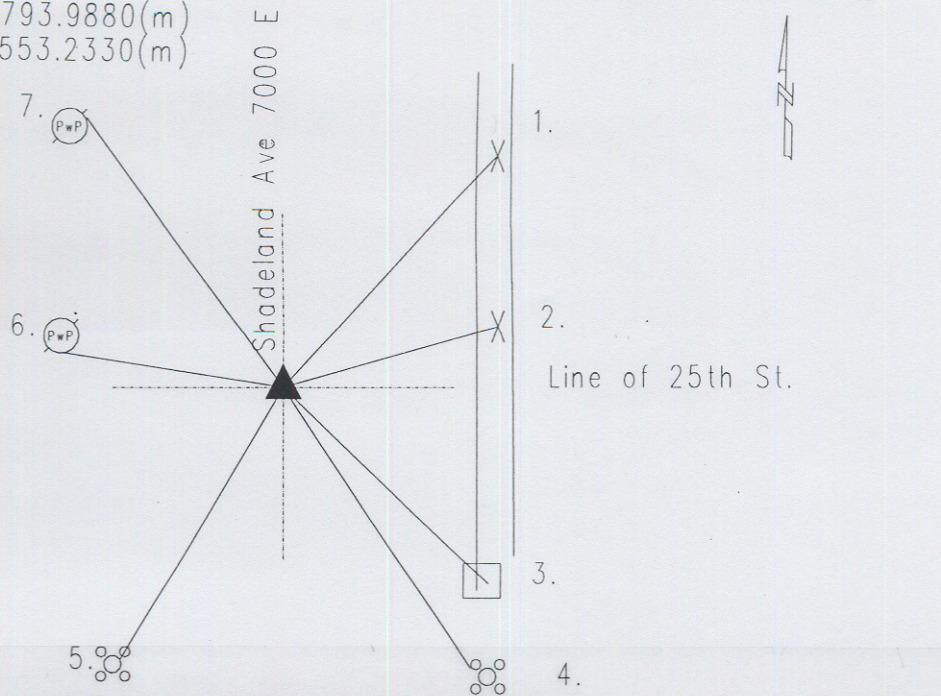

Corner originally set as a post in 1820 by John Hendricks with the following witnesses: 24" ash bearing south 14 degrees, thence east 28 links; and a 15" red oak bearing north 42 degrees, thence west 13 links. (M.C. Atlas p. 11) A survey by H. B. Fatout on April 27, 1882 indicates no stone or witnesses. (Warren Legal Book p. 5) Corner referenced by Warner on 6/18/48 and called a brass pin. Corner referenced by Monroe on 7/13/51 and called a brass pin. Corner referenced by SeFranka on 2/6/70 and called a brass pin. Corner referenced by Miller on 3/4/76 and called a p.k. nail over brass plug. Corner referenced by Wilcoxon on 3/16/92 and called a p.k. nail over brass plug. Corner referenced by Wilcoxon on 10/22/97 and called a p.k. nail over brass plug. Corner excavated by Wilcoxon on 10/25/04 and a brass plug was found 3" down. No other points were found. A #205 cast iron Harrison Monument was set in position as the corner.

16042504

REF.	DISTANCE	DESCRIPTION
1.	49.99'	Cut 'x' in curb
2.	35.01'	Cut 'x' in curb
3.	64.07'	Cut 'x' SE corner of storm inlet
4.	116.50'	Cut 'x' NW-bolt aluminum pole base
5.	125.91'	Cut 'x' NE bolt aluminum pole base
6.	96.61'	PK nail S PwP#91-477 B 15"up
7.	108.96'	PK nail E PwP#6-447 B 12"up